



工具材料 コーティング 直径許容差 先端角 ねじれ角 シャンク径許差 直径範囲

●超ロング溝長で、深い穴加工に最適な汎用のコーティングオイルホールドリルです。

This side lock shank drill having ultra long flute is general coated oil-hole drills.




直径5.0~9.5
在庫品限り

LIST 6556P

オーダ方法

GOHL 直径

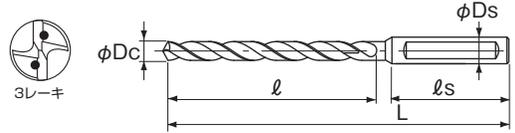

単位 (Unit) : mm

直径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	シャンク長 ℓs	在庫 Stock
5.0	150	220	16	48	
5.5					
6.0					
6.5					
7.0					
7.5					
8.0					
8.5					
9.0					
9.5					
10.0	200	270	20	50	
10.5					
11.0					
11.5					
12.0					
12.5					
13.0					
13.5					
14.0					
14.5					
15.0	280	365	25	56	□
15.5					
16.0					
16.5					
17.0					
17.5					
18.0					
18.5					
19.0					
19.5					
20.0	280	390	32	62	
20.5					
21.0					
21.5					
22.0					
22.5					
23.0					
23.5					
24.0					
24.5					
25.0					
25.5					
26.0					
26.5					
27.0					
27.5					
28.0					
28.5					
29.0					
29.5					
30.0					
30.5					
31.0					
31.5					
32.0					
32.5					
33.0					
33.5					
34.0					
34.5					

直径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	シャンク長 ℓs	在庫 Stock
35.0	280	390	32	62	□
35.5					
36.0					
36.5					
37.0					
37.5					
38.0					
38.5					
39.0					
39.5					
40.0					

□は特定代理店在庫品です。
Available for Japan customers only.

低炭素鋼 軟鋼	炭素鋼 合金鋼	プレハードン鋼 高合金鋼	調質鋼	焼入鋼
SS400, S10C ~ 150HB	S45C, SCM440 ~ 225HB	SUJ, NAK ~ 275HB	SKD, SKH 30 ~ 40HRC	Hardened Steels 40 ~ 50HRC
○	○	○	○	×
ステンレス鋼		耐熱合金	鋳鉄	アルミ合金 銅合金
SUS304	SUS420	Ti/Ni Alloys	FC/FCD	Al/Cu
○	○	○	○	○

◎:最適 Excellent ○:適用 Good ×:不適 Not Used 無印 (No mark):推奨しません Not recommended