



高速加工用油穴付き超硬レギュラ形
CARBIDE REGULAR FOR HIGH SPEED PROCESSING WITH INTERNAL COOLANT SUPPLY

FX-HO-GDR

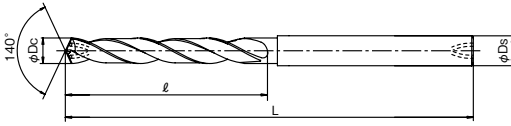

●マークの説明はP.2をご覧ください。See page 2 for explanation of icons.

単位:mm Unit:mm

ツールNo. EDP NO.	外径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	標準価格 (Yen)
	3	20	54	3		
	3.05					
	3.1	21				
	3.15					
	3.2	22				
	3.25					
	3.3	23				
	3.35					
	3.4	24	63	4		
	3.45					
	3.5	25				
	3.55					
	3.6	26				
	3.65					
	3.7	27				
	3.75					
	3.8	28				
	3.85					
	3.9	29				
	3.95					
	4	30				
	4.05					
	4.1	31				
	4.15					
	4.2	32	70	5		
	4.25					
	4.3	33				
	4.35					
	4.4	34				
	4.45					
	4.5	35				
	4.55					
	4.6	36				
	4.65					
	4.7	37				
	4.75					
	4.8					
	4.85					
	4.9					
	4.95					
	5					
	5.05					
	5.1					
	5.15					
	5.2					
	5.25					
	5.3					
	5.35					
	5.4					
	5.45					
	5.5					

□=特定代理店在庫品

1. 切削油剤はP.612をご参照下さい。

ツールNo. EDP NO.	外径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	標準価格 (Yen)
	5.55					
	5.6	38				
	5.65					
	5.7	39	84	6		
	5.75					
	5.8	40				
	5.85					
	5.9	41				
	5.95					
	6	42				
	6.05					
	6.1	43				
	6.15					
	6.2	44	90	7		
	6.25					
	6.3	45				
	6.35					
	6.4	46				
	6.45					
	6.5	47				
	6.55					
	6.6	48				
	6.65					
	6.7	49				
	6.75					
	6.8	50				
	6.85					
	6.9	51				
	6.95					
	7	52				
	7.05					
	7.1	53				
	7.15					
	7.2	54				
	7.25					
	7.3	55				
	7.35					
	7.4	56				
	7.45					
	7.5	57				
	7.55					
	7.6	58				
	7.65					
	7.7	59				
	7.75					
	7.8	60				
	7.85					
	7.9	61				
	7.95					
	8					

□= Stocked by specific distributors. Contact us for price & availability.

1. Cutting fluid : Please refer to P.612.

A, B, C, D=標準在庫品 A, B, C, D=Standard stock item.

□=特定代理店在庫品 □=Stocked by specific distributors. Contact us for price & availability.

形状寸法表

DRILLS

超硬ドリル