


超硬ドリル CARBIDE DRILLS

高速加工用油穴付き超硬スタブ形
CARBIDE STUB FOR HIGH SPEED PROCESSING WITH INTERNAL COOLANT SUPPLY

FX-HO-GDS

形状寸法表

DRILLS
超硬ドリル

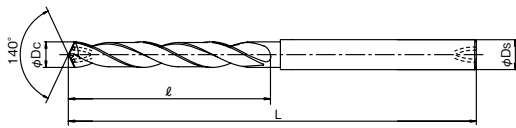

● マークの説明はP.2をご覧ください。See page 2 for explanation of icons.

単位:mm Unit:mm

ツールNo. EDP NO.	外径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	標準価格 (Yen)
	3	14	48	3		
	3.05					
	3.1	15				
	3.15					
	3.2					
	3.25					
	3.3					
	3.35	16				
	3.4					
	3.45					
	3.5		55	4		
	3.55					
	3.6					
	3.65	17				
	3.7					
	3.75					
	3.8					
	3.85	18				
	3.9					
	3.95					
	4					
	4.05	19				
	4.1					
	4.15					
	4.2					
	4.25	20			□	
	4.3					
	4.35					
	4.4					
	4.45	21				
	4.5		60	5		
	4.55					
	4.6					
	4.65	22				
	4.7					
	4.75					
	4.8					
	4.85	23				
	4.9					
	4.95					
	5					
	5.05					
	5.1	24				
	5.15					
	5.2					
	5.25					
	5.3		72	6		
	5.35	25				
	5.4					
	5.45					
	5.5	26				

ツールNo. EDP NO.	外径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	標準価格 (Yen)
	5.55					
	5.6	26				
	5.65					
	5.7		72	6		
	5.75	27				
	5.8					
	5.85					
	5.9					
	5.95	28				
	6					
	6.05					
	6.1					
	6.15	29				
	6.2					
	6.25					
	6.3					
	6.35	30				
	6.4					
	6.45					
	6.5		76	7		
	6.55					
	6.6	31				
	6.65					
	6.7					
	6.75					
	6.8				□	
	6.85	32				
	6.9					
	6.95					
	7					
	7.05	33				
	7.1					
	7.15					
	7.2					
	7.25	34				
	7.3					
	7.35					
	7.4					
	7.45	35				
	7.5					
	7.55		80	8		
	7.6					
	7.65	36				
	7.7					
	7.75					
	7.8					
	7.85	37				
	7.9					
	7.95					
	8	38				

□ = 特定代理店在庫品
1. 切削油剤はP.612をご参照下さい。

□ = Stocked by specific distributors. Contact us for price & availability.
1. Cutting fluid : Please refer to P.612.

A, B, C, D=標準在庫品 A, B, C, D=Standard stock item.
□ = 特定代理店在庫品 □ = Stocked by specific distributors. Contact us for price & availability.