


2TB



2 刃数
30° ねじれ角

鋼・鋳鉄のテーパ加工用

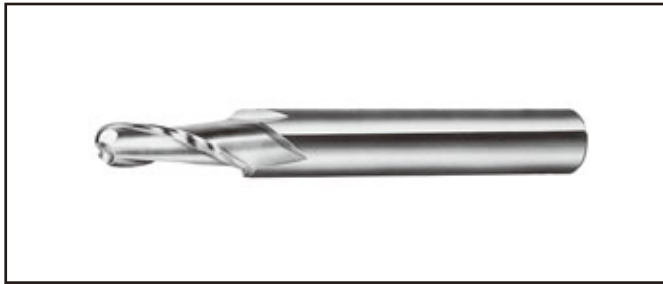

形番	在庫 超硬	勾配角 θ	寸法 (mm)				刃数			
			小端R	刃長	全長	シャンク径				
2TB0.25X0.5°	◇	30'	0.25	2	45	3.0	2			
2TB0.3X0.5°	◇		0.3							
2TB0.35X0.5°	◇		0.35							
2TB0.4X0.5°	◇		0.4							
2TB0.5X0.5°	◇		0.5							
2TB0.6X0.5°	◇		0.6	4	50	6.0				
2TB0.75X0.5°	◇		0.75							
2TB1.0X0.5°	◇		1.0	12	60	8.0				
2TB1.25X0.5°	◇		1.25							
2TB1.5X0.5°	◇		1.5	14	70	10.0				
2TB2.0X0.5°	◇		2.0							
2TB2.5X0.5°	◇		2.5	16	75	12.0				
2TB3.0X0.5°	◇		3.0							
2TB4.0X0.5°	◇		4.0	20	75	12.0				
2TB5.0X0.5°	◇		5.0							
2TB0.25X1.0°	◇		0.25					2	45	3.0
2TB0.3X1.0°	◇		0.3							
2TB0.35X1.0°	◇		0.35							
2TB0.4X1.0°	◇		0.4							
2TB0.5X1.0°	◇		0.5							
2TB0.6X1.0°	◇		0.6	4	50	6.0				
2TB0.75X1.0°	◇		0.75							
2TB1.0X1.0°	◇		1.0	12	60	8.0				
2TB1.25X1.0°	◇		1.25							
2TB1.5X1.0°	◇		1.5	14	70	10.0				
2TB2.0X1.0°	◇	2.0								
2TB2.5X1.0°	◇	2.5	16	75	12.0					
2TB3.0X1.0°	◇	3.0								
2TB4.0X1.0°	◇	4.0	24	80	12.0					
2TB5.0X1.0°	◇	5.0								
2TB0.25X1.5°	◇	0.25				2	45	3.0		
2TB0.3X1.5°	◇	0.3								
2TB0.35X1.5°	◇	0.35								
2TB0.4X1.5°	◇	0.4								
2TB0.5X1.5°	◇	0.5								
2TB0.6X1.5°	◇	0.6	4	50	6.0					
2TB0.75X1.5°	◇	0.75								
2TB1.0X1.5°	◇	1.0	12	60	8.0					
2TB1.25X1.5°	◇	1.25								
2TB1.5X1.5°	◇	1.5	14	70	10.0					
2TB2.0X1.5°	◇	2.0								
2TB2.5X1.5°	◇	2.5	16	75	12.0					
2TB3.0X1.5°	◇	3.0								
2TB4.0X1.5°	◇	4.0	24	80	12.0					
2TB5.0X1.5°	◇	5.0								
2TB0.25X2.0°	◇	0.25				2	45	3.0		
2TB0.3X2.0°	◇	0.3								
2TB0.35X2.0°	◇	0.35								
2TB0.4X2.0°	◇	0.4								
2TB0.5X2.0°	◇	0.5								
2TB0.6X2.0°	◇	0.6	4	50	6.0					
2TB0.75X2.0°	◇	0.75								
2TB1.0X2.0°	◇	1.0	14	60	8.0					

形番	在庫 超硬	勾配角 θ	寸法 (mm)				刃数						
			小端R	刃長	全長	シャンク径							
2TB1.25X2.0°	◇	2°	1.25	20	65	6.0	2						
2TB1.5X2.0°	◇		1.5										
2TB2.0X2.0°	◇		2.0										
2TB2.5X2.0°	◇		2.5										
2TB3.0X2.0°	◇		3.0										
2TB4.0X2.0°	◇		4.0	28	80	10.0							
2TB5.0X2.0°	◇		5.0					30	85	12.0			
2TB0.25X2.5°	◇		0.25	3	50	3.0							
2TB0.3X2.5°	◇		0.3										
2TB0.35X2.5°	◇		0.35	4	50	6.0							
2TB0.4X2.5°	◇	0.4											
2TB0.5X2.5°	◇	0.5											
2TB0.6X2.5°	◇	0.6											
2TB0.75X2.5°	◇	0.75	5				60	8.0					
2TB1.0X2.5°	◇	1.0		2°30'	14	60			2				
2TB1.25X2.5°	◇	1.25											
2TB1.5X2.5°	◇	1.5	20				65	8.0					
2TB2.0X2.5°	◇	2.0											
2TB2.5X2.5°	◇	2.5											
2TB3.0X2.5°	◇	3.0											
2TB4.0X2.5°	◇	4.0								28	85	12.0	
2TB5.0X2.5°	◇	5.0	30				85	12.0					
2TB0.25X3.0°	◇	0.25								3	50	3.0	
2TB0.3X3.0°	◇	0.3											
2TB0.35X3.0°	◇	0.35		4	50	6.0							
2TB0.4X3.0°	◇	0.4											
2TB0.5X3.0°	◇	0.5											
2TB0.6X3.0°	◇	0.6											
2TB0.75X3.0°	◇	0.75	5				60	8.0					
2TB1.0X3.0°	◇	1.0		3°	14	60			2				
2TB1.25X3.0°	◇	1.25											
2TB1.5X3.0°	◇	1.5	20				65	10.0					
2TB2.0X3.0°	◇	2.0											
2TB2.5X3.0°	◇	2.5											
2TB3.0X3.0°	◇	3.0											
2TB4.0X3.0°	◇	4.0								28	85	12.0	
2TB5.0X3.0°	◇	5.0	30				85	12.0					
2TB0.5X4.0°	◇	0.5								7	55	6.0	
2TB0.6X4.0°	◇	0.6											
2TB0.75X4.0°	◇	0.75		8	60	8.0							
2TB1.0X4.0°	◇	1.0											
2TB1.25X4.0°	◇	1.25											
2TB1.5X4.0°	◇	1.5	20				65	10.0					
2TB2.0X4.0°	◇	2.0							4°	22	70	2	
2TB2.5X4.0°	◇	2.5											
2TB3.0X4.0°	◇	3.0											
2TB4.0X4.0°	◇	4.0	28	80	10.0								
2TB5.0X4.0°	◇	5.0				30	85	12.0					
2TB0.5X5.0°	◇	0.5	7	55	6.0								
2TB0.6X5.0°	◇	0.6											
2TB0.75X5.0°	◇	0.75	8	60	8.0								
2TB1.0X5.0°	◇	1.0											
2TB1.25X5.0°	◇	1.25											
2TB1.5X5.0°	◇	1.5				20	65	10.0					
2TB2.0X5.0°	◇	2.0							5°	20	70	2	
2TB2.5X5.0°	◇	2.5											
2TB3.0X5.0°	◇	3.0											
2TB4.0X5.0°	◇	4.0	28	80	10.0								
2TB5.0X5.0°	◇	5.0				30	85	12.0					
2TB1.0X7.0°	◇	1.0	24	80	8.0								
2TB1.25X7.0°	◇	1.25											7°
2TB1.5X7.0°	◇	1.5											
2TB2.0X7.0°	◇	2.0	28	85	10.0								
2TB2.5X7.0°	◇	2.5				34	90	12.0					

製品在庫 ◇: 当商品は専門店在庫です

10

エンドミル

関連事項

切削条件
(10-67)

技術資料
(15-1)

2TB



2TB-L ロング刃



2 刃数
30° ねじれ角

鋼・鋳鉄のテーパ加工用

2 刃数
30° ねじれ角

鋼・鋳鉄のテーパ加工用
ロングタイプ

形番	在庫 超硬	勾配角 θ	寸法 (mm)				刃数
			小端R	刃長	全長	シャンク径	
2TB3.0X7.0°	◇	7°	3.0	34	90	12.0	2
2TB1.0X10.0°	◇	10°	1.0	24	80	12.0	2
2TB1.25X10.0°	◇		1.25				
2TB1.5X10.0°	◇		1.5				
2TB2.0X10.0°	◇		2.0				

公差 (2TB)

シャンク径公差	h6
---------	----



標準材種: 超合金EM

形番	在庫 超硬	勾配角 θ	寸法 (mm)				刃数		
			小端R	刃長	全長	シャンク径			
2TB-L0.25X0.5°	◇	30°	0.25	5	55	3.0	2		
2TB-L0.3X0.5°	◇		0.3	6					
2TB-L0.35X0.5°	◇		0.35	7					
2TB-L0.4X0.5°	◇		0.4	8					
2TB-L0.5X0.5°	◇		0.5	10	60	6.0			
2TB-L0.6X0.5°	◇		0.6					10	
2TB-L0.75X0.5°	◇		0.75	20	70			12.0	
2TB-L1.0X0.5°	◇		1.0						17
2TB-L1.25X0.5°	◇		1.25	24	80	10.0			
2TB-L1.5X0.5°	◇		1.5					20	
2TB-L2.0X0.5°	◇		2.0	28	85	12.0			
2TB-L2.5X0.5°	◇		2.5					24	
2TB-L3.0X0.5°	◇		3.0	34	91	16.0			
2TB-L4.0X0.5°	◇		4.0					24	
2TB-L5.0X0.5°	◇		5.0	40	106	20.0			
2TB-L6.0X0.5°	◇		6.0					34	
2TB-L8.0X0.5°	◇		8.0	10.0	106	20.0			
2TB-L10.0X0.5°	◇		10.0					40	
2TB-L0.25X1.0°	◇		1°	0.25	5	55		3.0	2
2TB-L0.3X1.0°	◇			0.3	6				
2TB-L0.35X1.0°	◇	0.35		7					
2TB-L0.4X1.0°	◇	0.4		8					
2TB-L0.5X1.0°	◇	0.5		10	60	6.0			
2TB-L0.6X1.0°	◇	0.6					10		
2TB-L0.75X1.0°	◇	0.75		22	70		12.0		
2TB-L1.0X1.0°	◇	1.0						22	
2TB-L1.25X1.0°	◇	1.25		26	75	8.0			
2TB-L1.5X1.0°	◇	1.5					26		
2TB-L2.0X1.0°	◇	2.0		32	85	10.0			
2TB-L2.5X1.0°	◇	2.5					32		
2TB-L3.0X1.0°	◇	3.0		38	95	12.0			
2TB-L4.0X1.0°	◇	4.0					38		
2TB-L5.0X1.0°	◇	5.0		45	102	16.0			
2TB-L6.0X1.0°	◇	6.0					45		
2TB-L8.0X1.0°	◇	8.0		10.0	119	20.0			
2TB-L10.0X1.0°	◇	10.0					53		
2TB-L0.25X1.5°	◇	1°30'		0.25	5	55	3.0	2	
2TB-L0.3X1.5°	◇			0.3	6				
2TB-L0.35X1.5°	◇		0.35	7					
2TB-L0.4X1.5°	◇		0.4	8					
2TB-L0.5X1.5°	◇		0.5	10	60	6.0			
2TB-L0.6X1.5°	◇		0.6				10		
2TB-L0.75X1.5°	◇		0.75	22	70		12.0		
2TB-L1.0X1.5°	◇		1.0						22
2TB-L1.25X1.5°	◇		1.25	26	75	8.0			
2TB-L1.5X1.5°	◇		1.5				26		
2TB-L2.0X1.5°	◇		2.0	32	80	10.0			
2TB-L2.5X1.5°	◇		2.5				32		
2TB-L3.0X1.5°	◇		3.0	38	95	12.0			
2TB-L4.0X1.5°	◇		4.0				38		
2TB-L5.0X1.5°	◇		5.0	45	102	16.0			
2TB-L6.0X1.5°	◇		6.0				45		
2TB-L8.0X1.5°	◇		8.0	10.0	106	20.0			
2TB-L10.0X1.5°	◇		10.0				53		

製品在庫 ◇: 当商品は専門店在庫です

10

エンドミル