




TYPE 1

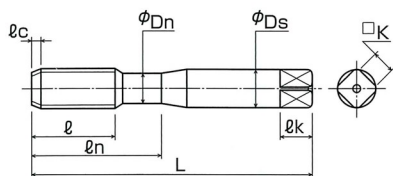

※食付き1.5Pは先端トガリセンターを除去しております。

●メートルねじ用

Metric

単位 (Unit): mm

アイテム No. Item No.	呼び Nominal size	食付 ℓ_c	精度 Limit	形状 Type	形状寸法 (mm) Dimensions							溝数 Flutes	ZC溝数 ZC groove	連結溝 Consolidated
					L	ℓ	Ds	ℓ_n	Dn	K	ℓ_k			
18058	M3 × 0.5	1.5P	5	1	100	10	4	18	2.4	3.2	6	4	1	有
□	M3 × 0.5	1.5P	6	1	100	10	4	18	2.4	3.2	6	4	1	有
□	M3 × 0.5	1.5P	7	1	100	10	4	18	2.4	3.2	6	4	1	有
18059	M4 × 0.7	1.5P	6	1	100	10	5	20	3.15	4	7	4	1	有
□	M4 × 0.7	1.5P	7	1	100	10	5	20	3.15	4	7	4	1	有
□	M4 × 0.7	1.5P	8	1	100	10	5	20	3.15	4	7	4	1	有
18060	M5 × 0.8	1.5P	6	1	100	10	5.5	25	4	4.5	7	4	1	有
□	M5 × 0.8	1.5P	7	1	100	10	5.5	25	4	4.5	7	4	1	有
□	M5 × 0.8	1.5P	8	1	100	10	5.5	25	4	4.5	7	4	1	有
18061	M6 × 1	1.5P	7	1	100	10	6	30	4.6	4.5	7	4	1	有
□	M6 × 1	1.5P	8	1	100	10	6	30	4.6	4.5	7	4	1	有
□	M6 × 1	1.5P	9	1	100	10	6	30	4.6	4.5	7	4	1	有
18063	M8 × 1.25	1.5P	7	1	100	18	8	40	6	6	9	6	2	有
□	M8 × 1.25	1.5P	8	1	100	18	8	40	6	6	9	6	2	有
□	M8 × 1.25	1.5P	9	1	100	18	8	40	6	6	9	6	2	有
18064	M10 × 1.5	1.5P	7	1	100	19	8	39	6.8	6	9	6	2	有
□	M10 × 1.5	1.5P	8	1	100	19	8	39	6.8	6	9	6	2	有
□	M10 × 1.5	1.5P	9	1	100	19	8	39	6.8	6	9	6	2	有
18065	M10 × 1.25	1.5P	7	1	100	19	8	39	6.8	6	9	6	2	有
□	M10 × 1.25	1.5P	8	1	100	19	8	39	6.8	6	9	6	2	有
□	M10 × 1.25	1.5P	9	1	100	19	8	39	6.8	6	9	6	2	有
18066	M10 × 1	1.5P	7	1	100	19	8	39	6.8	6	9	6	2	有
□	M10 × 1	1.5P	8	1	100	19	8	39	6.8	6	9	6	2	有
□	M10 × 1	1.5P	9	1	100	19	8	39	6.8	6	9	6	2	有
□	M12 × 1.75	1.5P	8	1	100	19	10	43	8.3	8	11	6	2	有
18067	M12 × 1.75	1.5P	10	1	100	19	10	43	8.3	8	11	6	2	有
□	M12 × 1.75	1.5P	12	1	100	19	10	43	8.3	8	11	6	2	有
□	M12 × 1.5	1.5P	8	1	100	19	10	43	8.3	8	11	6	2	有
18068	M12 × 1.5	1.5P	10	1	100	19	10	43	8.3	8	11	6	2	有
□	M12 × 1.5	1.5P	12	1	100	19	10	43	8.3	8	11	6	2	有
□	M12 × 1.25	1.5P	8	1	100	19	10	43	8.3	8	11	6	2	有
□	M12 × 1.25	1.5P	10	1	100	19	10	43	8.3	8	11	6	2	有
18069	M12 × 1.25	1.5P	12	1	100	19	10	43	8.3	8	11	6	2	有

・精度欄の は2級めねじ相当適応の推奨精度です。

・ The recommended tap limit in corresponds to JIS Class 2 internal thread standard.

・ □は専門店在庫です。当社までお問い合わせください。